ROKOR PLUS



ROKOR PLUS

SAINT ROCH hypoeutectic cast iron

SAINT ROCH hypoeutectic cast iron has remarkable mechanical strength and prevents corrosion from starting. Elements of the combustion chamber are assembled in the factory by biconical steel nipples.

The ROKOR PLUS boilers with high efficiency (upper to the 90%). The cast iron combustion chamber door pivots right or left and is easy to maintain.



- 1 Standard burner orifice
- 2 Right/left pivoting cast iron door





A COMPLETE RANGE

The ROKOR PLUS range includes 6 models 24,5 - 97 kW, so that you can choose the model that corresponds to your installation.

LOW TEMPERATURE

The ROKOR PLUS operates at very low temperature or sliding temperature, so as to optimise operational heating efficiency in different seasons. The boiler remains cold when there is no heating or domestic hot water demand.

REINFORCED INSULATION

The thick insulation (100 mm) on all surfaces, prevents heat losses.

A COMPLETE EQUIPMENT

A cast iron heating body with assembled elements.

The control panel includes:

- · Circuit for regulator
- On/Off switch
- Summer/winter switch
- Boiler thermostat
- Boiler thermometer
- Safety thermostat
- Pre-equipped housing for regulation
- Burner Euroconnector

BURNER OPTION

Bentone burners are single-piece and silent and perfectly integrates into the boiler for remarkable acoustics comfort, and ease of use.




ROKOR PLUS

Technical data





SAINT ROCH offers a complete range of regulations and accessories that make indisputable savings and provide even more comfort.

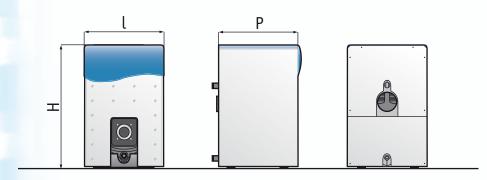

MANUFACTURER'S GUARANTEE

The ROKOR PLUS cast iron combustion chamber is guaranteed for 5 years, like all SAINT ROCH boilers. Control and instrumentation devices are guaranteed for 1 year.

DELIVERY

The ROKOR PLUS is delivered with the cast iron block assembled. The jacket and accessories are supplied separately.

Model	3	4	5	6	7	8
Heat output, kW	24.5	39	53	68	82	97
Input power, kW	27	43	58,5	75	90,5	107
Working pressure, Bar	6	6	6	6	6	6
Maximum working temperature, C	100	100	100	100	100	100
Water capacity, liters	16	22	29	36	43	50
	0.16	0.21	0.32	0.47	0.58	0.69
Ø Heating supply/return	1.14"	1.14"	1.14"	1.14"	1.14"	1.14"
Ø Flue outlet, mm	150	150	150	150	150	1503
Numbers of sections	3	4	5	6	7	8
Overall dimensions, mm Height H	880	880	880	880	880	880
Width L	600	600	600	600	600	600
Depth P	600	600	770	770	900	1150
Shipping weight, kg	202	240	278	316	354	392
Recommended burners	Bentone	Bentone	Bentone	Bentone	Bentone	Bentone
Domestic hot water option (GTC 0)	•	•	•	•	•	•
Climate control and priority hot water	•	•	•	•	•	

Your distributor



Saint Roch Rue de la Gare, 36 B 5660 COUVIN BELGIUM

Tel: 060/34 56 51

Fax: 060/34 62 28 (commercial) 060/34 56 58 (administrative)

Vľ